




NON API PUMPS

Mechanically Actuated Diaphragm Type Pumps

Features :

- Simple Design, Economical & Easy to maintain
- No Leakage & Low NPSHR
- Suitable for Flame Proof Area
- Wide range of plastic & Metallic MOCs

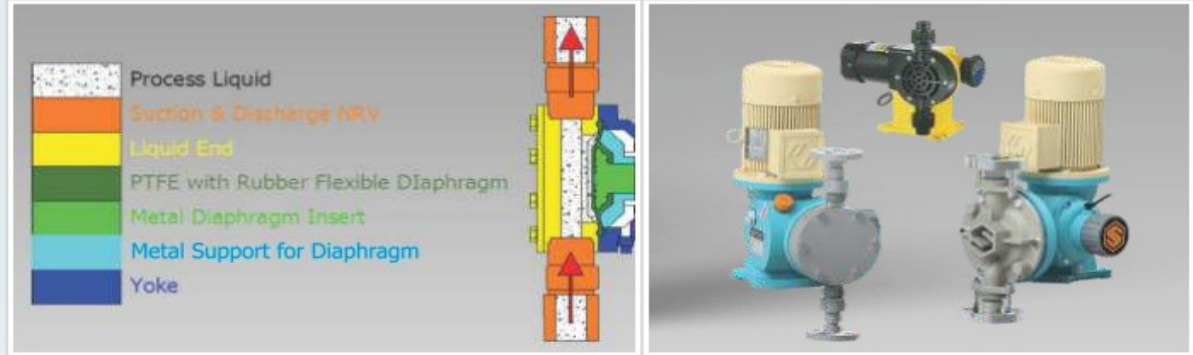

PUMP MODEL	Stroke Lg (MM)	DIAPH DIA	SPM	Max Capacity (LPH)	Max Pressure (kg/cm Sa)	Connection (mm)	Max Motor (KW)
DP/3/DIA/50	3	50	29	6	6	15	0.04
DP/3/DIA/50	3	50	48	9.9	6	15	0.04
DP/3/DIA/65	3	65	29	12	6	15	0.04
DP/2/DIA/80	2	80	49	20	8	15	0.37
DP/3/DIA/50	3	50	98	20	6	15	0.04
DP/3/DIA/65	3	65	48	20	6	15	0.04
DP/2/DIA/90	2	90	49	26	8	15	0.37
DP/3/DIA/50	3	50	144	31	6	15	0.06
DP/4/DIA/80	4	80	49	40	8	15	0.37
DP/3/DIA/65	3	65	98	42	6	15	0.06
DP/3/DIA/50	3	50	185	43	6	15	0.06
DP/4/DIA/90	4	90	49	52	8	15	0.37
DP/3/DIA/65	3	65	144	64	6	20	0.06
DP/8/DIA/80	8	80	49	89	8	20	0.37
DP/8/DIA/90	8	90	49	115	7.3	20	0.37
DP/8/DIA/100	8	100	49	143	5.6	20	0.37
DP/8/DIA/120	8	120	49	147	3.4	20	0.37
DP/8/DIA/80	8	80	98	178	8	25	0.37
DP/8/DIA/90	8	90	98	221	7.4	25	0.37
DP/8.5/DIA/130	8.5	130	49	243	8	25	0.75
DP/8/DIA/80	8	80	147	268	8	25	0.37
DP/8/DIA/100	8	100	98	286	5.7	25	0.37
DP/8/DIA/90	8	90	147	345	7	25	0.37
DP/8.5/DIA/150	8.5	150	49	350	7.5	25	0.75
DP/8/DIA/80	8	80	196	379	6	25	0.75
DP/8/DIA/120	8	120	98	388	3.5	25	0.37
DP/8.5/DIA/170	8.5	170	49	425	5.5	25	0.75
DP/8/DIA/100	8	100	147	429	5.4	25	0.37
DP/8/DIA/90	8	90	196	460	4.4	25	0.75
DP/8.5/DIA/130	8.5	130	98	487	7.8	25	0.75
DP/8/DIA/100	8	100	196	543	3.3	25	0.75
DP/8/DIA/120	8	120	147	582	3.3	25	0.75
DP/8.5/DIA/150	8.5	150	98	700	5.5	40	0.75
DP/8.5/DIA/130	8.5	130	147	730	7.1	40	0.75
DP/8/DIA/120	8	120	196	777	1.8	40	0.75
DP/8.5/DIA/170	8.5	170	98	851	4	40	0.75
DP/8.5/DIA/130	8.5	130	196	973	6.1	40	1.12
DP/8.5/DIA/150	8.5	150	147	1050	4.9	40	0.75
DP/8.5/DIA/170	8.5	170	147	1251	3.5	40	1.12
DP/8.5/DIA/150	8.5	150	196	1400	4.2	40	1.12
DP/8.5/DIA/170	8.5	170	196	1932	2.9	50	1.12